

Fire Hose Reels



previtop®



PREVITOP - Comércio e Serviços Unipessoal, Lda
www.previtop.pt



Company Registered in ANPC with n° 500

Swinging Hose Reel for Wall-Mounting

HOSE SYSTEM 25 MM

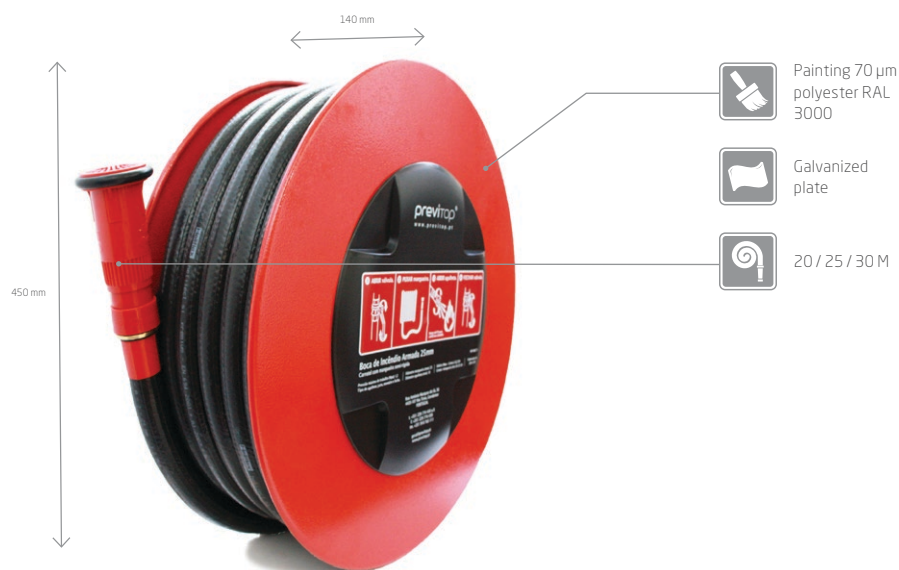

To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
10LT-20	20	450 x 180

HOSE REEL SPECIFICATIONS

- » Rim in 1 mm galvanized steel plate.
- » Reel in galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

INCLUDES

- » Water supplier with:
 - » Male ball valve with 1" manometer;
 - » 25 mm male connection fitting;
 - » "Super" hose clamp;
- » Axial support (SWINGING).
- » Installation and maintenance instructions.

NOTES

- » Orders must be placed by model + dimensions.
- » Accessories for connecting to water supplier not included.




CE Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

Ideal for use in schools, office buildings, hospitals, sports arenas, cinemas, etc.

Swinging Hose Reel for Wall-Mounting

HOSE SYSTEM 25 MM



To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
10B-20	20 and 25	530 x 140
10B-25		
10B-30	30	530 x 180

HOSE REEL SPECIFICATIONS

- » Rim in 1 mm galvanized steel plate.
- » Reel in galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

INCLUDES

- » Water supplier with:
 - » Male ball valve with 1" manometer;
 - » 25 mm male connection fitting;
 - » "Super" hose clamp;
- » Axial support (SWINGING).
- » Installation and maintenance instructions.

NOTES

- » Orders must be placed by model + dimensions.




Ideal for use in schools, office buildings, hospitals, sports arenas, cinemas, etc.

CE Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

Fixed Hose Reel for Wall-Mounting

HOSE SYSTEM 25 MM



To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x D
10F-20	20 and 25	530 x 140
10F-25		
10F-30	30	530 x 180

HOSE REEL SPECIFICATIONS

- » Rim in 1 mm galvanized steel plate.
- » Reel in galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

INCLUDES

- » Water supplier with:
 - » Male ball valve with 1" manometer;
 - » 25 mm male connection fitting;
 - » "Super" hose clamp;
- » Fixed support.
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

NOTES

- » Orders must be placed by model + dimensions.




Ideal for use in schools, office buildings, hospitals, sports arenas, cinemas, etc.

CE Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

Industrial Cleaning Hose Reel

HOSE SYSTEM 25 MM

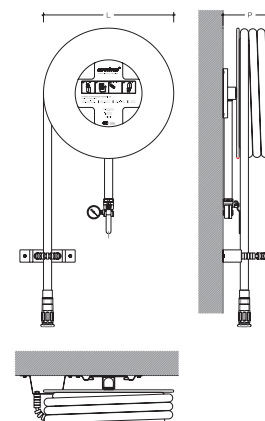

To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x D
10LF-20	20	530 x 120
10LF-25	25	530 x 140
10LF-30	30	530 x 165

HOSE REEL SPECIFICATIONS

- » Rim in 1 mm galvanized steel plate.
- » Reel in galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

INCLUDES

- » Water supplier with:
 - » Male ball valve with 1" manometer;
 - » 25 mm male connection fitting;
 - » "Super" hose clamp;
- » Fixed support.
- » Installation and maintenance instructions.

NOTES

- » Orders must be placed by model + dimensions.
- » For other colors please mention RAL reference in the order.

Options	Cabinet
	Stainless Steel A 304
	Stainless Steel A 430
	Corten Steel



Ideal for use in schools, office buildings, hospitals, sports arenas, cinemas, etc.

CE Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.