

# HIGH Range



**previTOP®**



PREVITOP - Comércio e Serviços Unipessoal, Lda  
[www.previtop.pt](http://www.previtop.pt)



Company Registered in ANPC with n° 500

# Fire Hose Reel and Cabinet

HOSE SYSTEM 25 MM

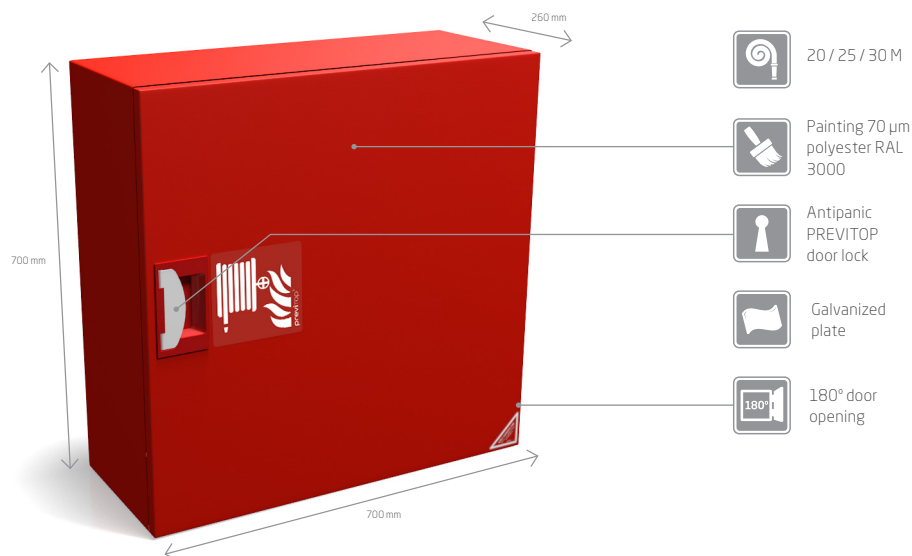

To download a CAD file please go to [www.previtop.pt](http://www.previtop.pt). Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11-20H	20, 25 and 30	700 x 700 x 260
11-25H		
11-30H		
20.1	Trim frame 25 mm	700 x 700

## HOSE REEL SPECIFICATIONS

- » 1 mm galvanized steel plate side discs.
- » Galvanized steel plate cylinder.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

## CABINET SPECIFICATIONS

- » Cabinet made in 1,5 mm galvanized steel plate.
- » Painting 70 µm polyester RAL 3000 or RAL 7032.
- » Antipanic PREVITOP door lock.
- » Ventilated sides.
- » Drilled holes for mounting.
- » 180° door opening.
- » Exterior door.

## INCLUDES

- » Water supply with:
  - » Male ball valve with 1" manometer;
  - » 25 mm male connection fitting;
  - » "Super" hose clamp.
- » Axial support (SWINGING).
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

## NOTES

- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The cabinet can be used for WALL-MOUNTING or RECESS-MOUNTING.
- » This cabinet can be requested with the measurements shown in the options box to accommodate a globe valve/storz.
- » The globe valve is sold separately.
- » Orders must be placed by model + dimensions.




Ideal for use in schools, office buildings, hospitals, sports arenas, cinemas, etc.

Options	Cabinet Colour	Accessories	Other Dimensions (mm)
	RAL Ref.: (custom colour)	Door with vision panel/ Trim frame	700 x 800 x 260*

**CE** Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

# Fire Hose Reel and Stainless Steel Cabinet

HOSE SYSTEM 25 MM

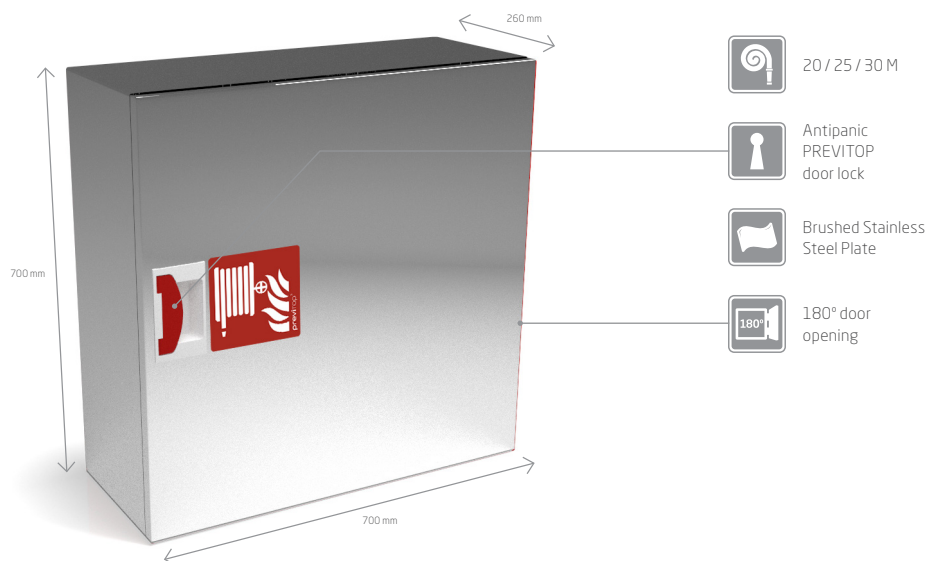

20 / 25 / 30 M




Antipanic  
PREVITOP  
door lock



Brushed Stainless  
Steel Plate



180° door  
opening



To download a CAD file please go to  
[www.previtop.pt](http://www.previtop.pt). Free registration  
and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11-20H	20, 25 and 30	700 x 700 x 260
11-25H		
11-30H		
20.1	Trim frame 25 mm	700 x 700

## HOSE REEL SPECIFICATIONS

- » Abas galvanized steel plate 1 mm.
- » Tambor galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

## CABINET SPECIFICATIONS

- » Cabinet made of 1 to 1,2 mm A304 stainless steel plate.
- » Brushed finish.
- » Antipanic PREVITOP door lock.
- » Ventilated sides.
- » Drilled holes for mounting.
- » 180° door opening.
- » Exterior door.

## IIINCLUDES

- » Water supply with:
  - » Male ball valve with 1"manometer;
  - » 25 mm male connection fitting;
  - » "Super" hose clamp.
- » Axial support (SWINGING).
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

## NOTES



- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The cabinet can be used for WALL-MOUNTING or RECESS-MOUNTING.
- » Orders must be placed by model + dimensions.

Options	Accessories	Cabinet
	Door with vision panel Trim frame	Stainless Steel A 304 Stainless Steel A 430 Stainless Steel A 316

**CE** Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

# Fire Hose Reel and Cabinet with Compartment for Fire Extinguisher

HOSE SYSTEM 25 MM

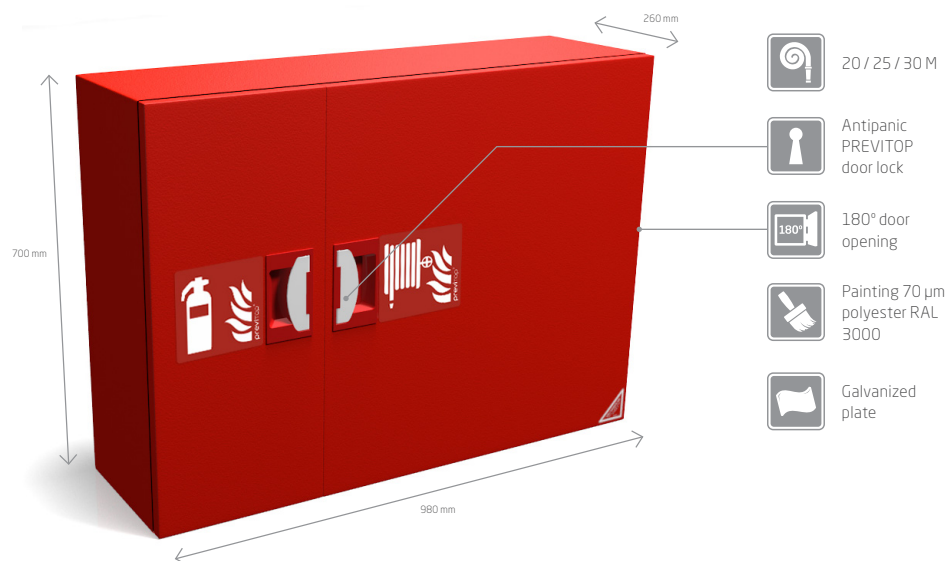

To download a CAD file please go to [www.previtop.pt](http://www.previtop.pt). Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11.1-20H	20, 25 and 30	700 x 980 x 260
11.1-25H		
11.1-30H		
20.1	Trim frame 25 mm	700 x 980

## HOSE REEL SPECIFICATIONS

- » Abas galvanized steel plate 1 mm.
- » Tambor galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

## CABINET SPECIFICATIONS


- » Cabinet in galvanized steel plate 1,50 mm.
- » Painting 70 µm polyester RAL 3000 or RAL 7032.
- » Antipanic PREVITOP door lock.
- » Ventilated sides.
- » Drilled holes for mounting.
- » Vertical prop for door jambs.
- » 180° door opening.
- » Exterior door.

## INCLUDES

- » Water supply with:
  - » Male ball valve with 1"manometer;
  - » 25 mm male connection fitting;
  - » "Super" hose clamp.
- » Axial support (SWINGING).
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

## NOTES

- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The cabinet can be used for WALL-MOUNTING or RECESS-MOUNTING.
- » Orders must be placed by model + dimensions.




Ideal para o uso em escolas, escritórios, hospitais, recintos desportivos, cinemas, etc.






Options	Cabinet Colour	Accessories	Cabinet
	RAL Ref.: (custom colour)	Door with vision panel/ Trim frame	Stainless Steel A 304 Stainless Steel A 430 Stainless Steel A 316


**CE** Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.
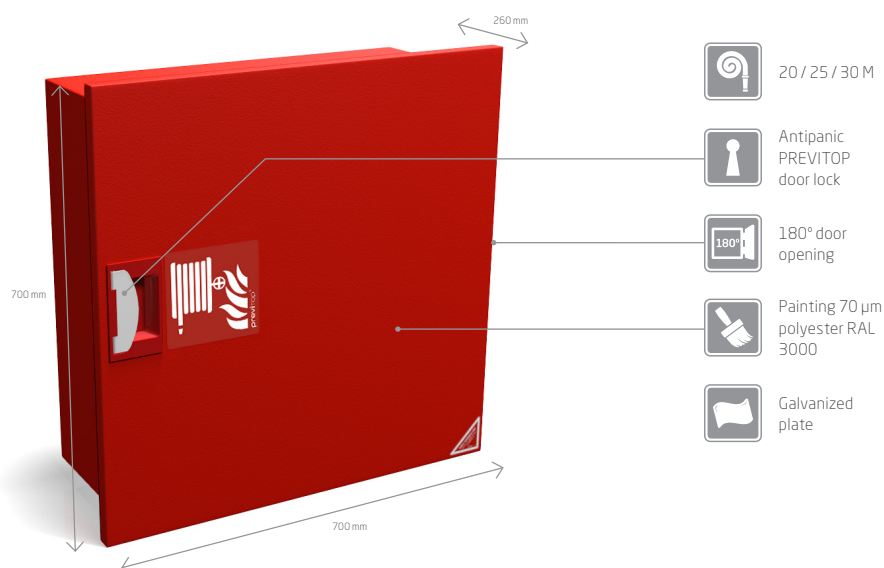
# Fire Hose Reel and Cabinet

HOSE SYSTEM 25 MM



-  20 / 25 / 30 M
-  Antipanic PREVITOP door lock
-  180° door opening
-  Painting 70 µm polyester RAL 3000
-  Galvanized plate



To download a CAD file please go to [www.previtop.pt](http://www.previtop.pt). Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11.2-20H	20, 25 and 30	700 x 700 x 260
11.2-25H		
11.2-30H		

## HOSE REEL SPECIFICATIONS

- » Abas galvanized steel plate 1 mm.
- » Tambor galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

## CABINET SPECIFICATIONS

- » Inner box in 0,8 and 1,0 mm galvanized steel plate.
- » Cabinet claw clamps.
- » Frame with 1,5 mm galvanized plate door.
- » Painting 70 µm polyester RAL 3000 or RAL 7032.
- » Antipanic PREVITOP door lock.
- » 180° door opening.
- » Exterior doors.

## INCLUDES

- » Water supply with:
  - » Male ball valve with 1"manometer;
  - » 25 mm male connection fitting;
  - » "Super" hose clamp.
- » Axial support (SWINGING).
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

## NOTES

- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The advised measure for the recess is 670 x 670 x 260 mm.
- » RECESS-MOUNTING only.
- » Orders must be placed by model + dimensions.





Ideal for use in schools, office buildings, hospitals, sports arenas, cinemas, etc.

Options	Cabinet Colour	Accessories	Cabinet
	RAL Ref.: (custom colour)	Door with vision panel	Stainless Steel A 304 Stainless Steel A 430 Stainless Steel A 316

**CE** Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

# Fire Hose Reel and Cabinet with Compartment for Fire Extinguisher

HOSE SYSTEM 25 MM

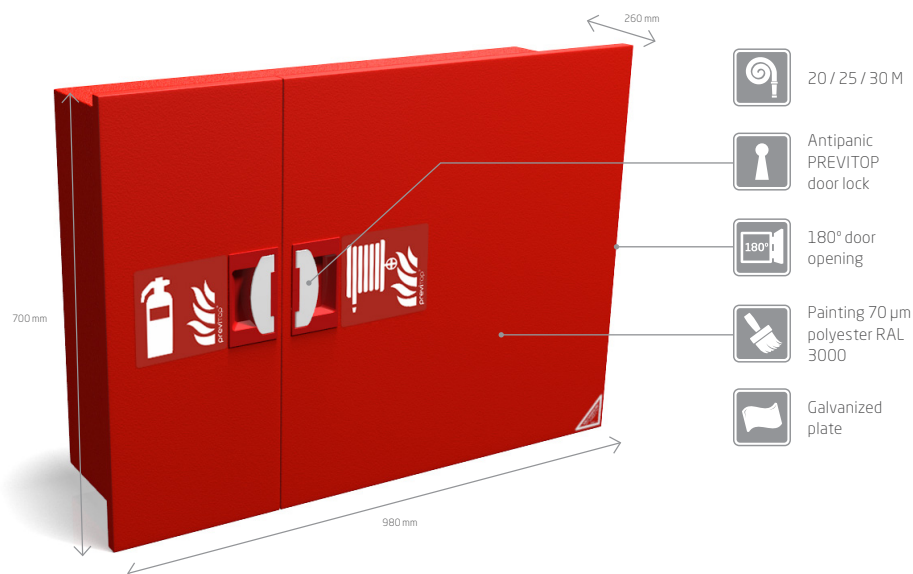

To download a CAD file please go to [www.previtop.pt](http://www.previtop.pt). Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11.2.1-20H	20, 25 and 30	700 x 980 x 260
11.2.1-25H		
11.2.1-30H		

## HOSE REEL SPECIFICATIONS

- » Abas galvanized steel plate 1 mm.
- » Tambor galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

## CABINET SPECIFICATIONS



- » Inner box in 0,8 and 1,0 mm galvanized steel plate.
- » Cabinet claw clamps.
- » Frame with 1,5 mm galvanized plate door.
- » Painting 70 µm polyester RAL 3000 or RAL 7032.
- » Antipanic PREVITOP door lock.
- » 180° door opening.
- » Exterior doors.

## INCLUDES

- » Water supply with:
  - » Male ball valve with 1"manometer;
  - » 25 mm male connection fitting;
  - » "Super" hose clamp.
- » Axial support (SWINGING).
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

## NOTES

- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The advised measure for the recess is 670 x 950 x 260 mm.
- » RECESS-MOUNTING only.
- » Orders must be placed by model + dimensions.



Ideal for use in schools, office buildings, hospitals, sports arenas, cinemas, etc.



Options	Cabinet Colour	Accessories	Cabinet
	RAL Ref.: (custom colour)	Door with vision panel	Stainless Steel A 304 Stainless Steel A 430 Stainless Steel A 316

**CE** Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.



# Hose Reel and Cabinet with Foam Tank

HOSE SYSTEM 25 MM

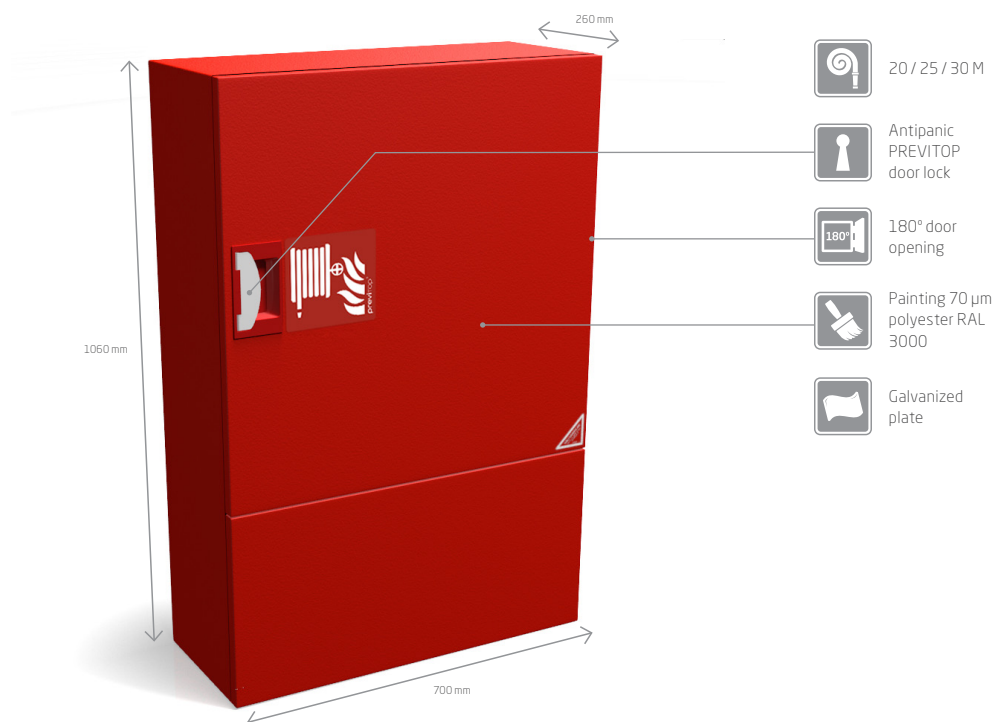

To download a CAD file please go to [www.previtop.pt](http://www.previtop.pt). Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11.3-20H	20, 25 and 30	1060 x 700 x 260
11.3-25H		
11.3-30H		
20.1	Trim frame 25 mm	1060 x 700

## HOSE REEL SPECIFICATIONS

- » Abas galvanized steel plate 1,5 mm.
- » Tambor galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

## CABINET SPECIFICATIONS

- » Cabinet made in 1,50 mm galvanized steel plate.
- » Two compartments.
- » Painting 70 µm polyester RAL 3000 or RAL 7032.
- » Antipanic PREVITOP door lock.
- » Ventilated sides.
- » Drilled holes for mounting.
- » 180° door opening.
- » Exterior door.

## INCLUDES

- » Water supply with:
  - » Male ball valve with 1" manometer;
  - » 25 mm male connection fitting;
  - » "Super" hose clamp.
- » Axial support (SWINGING).
- » Stainless steel tank for 25 or 50 litres of foam.
- » Foam nozzle.
- » 3% and 6% foam eductor.
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

## NOTES

- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The cabinet can be used for WALL-MOUNTING or RECESS-MOUNTING.
- » Orders must be placed by model + dimensions.




Ideal for use in gas stations.

Options	Cabinet Colour	Accessories	Cabinet
	RAL Ref.: (custom colour)	Door with vision panel/ Trim frame/ AFFF 3% foam	Stainless Steel A 304 Stainless Steel A 430 Stainless Steel A 316

CE Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

# Fire Hose Reel and Vertical Combined Cabinet with Equipment Compartment

HOSE SYSTEM 25 MM

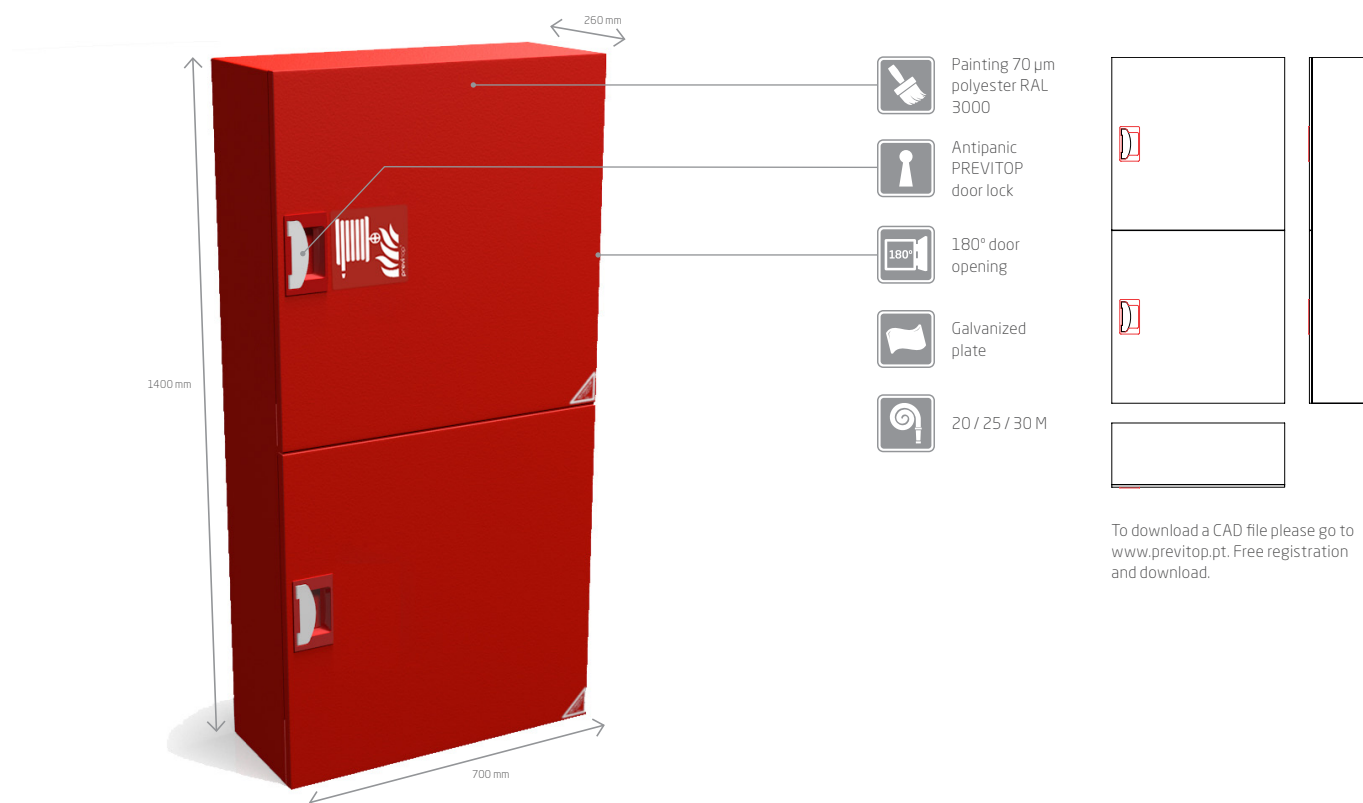

To download a CAD file please go to [www.previtop.pt](http://www.previtop.pt). Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11.5-20H	20, 25 and 30	1400 x 700 x 260
11.5-25H		
11.5-30H		
20.1	Trim frame 25 mm	1400 x 700

## HOSE REEL SPECIFICATIONS

- » Abas galvanized steel plate 1,5 mm.
- » Tambor galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

## CABINET SPECIFICATIONS

- » Cabinet made in 1,50 mm galvanized steel plate.
- » Double vertical and equal compartments.
- » Painting 70 µm polyester RAL 3000 or RAL 7032.
- » Antipanic PREVITOP door lock.
- » Ventilated sides.
- » Drilled holes for mounting.
- » 180° door opening.
- » Exterior doors.

## INCLUDES

- » Water supply with:
  - » Male ball valve with 1"manometer;
  - » 25 mm male connection fitting;
  - » "Super" hose clamp.
- » Axial support (SWINGING).
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

## NOTES

- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The cabinet can be used for WALL-MOUNTING or RECESS-MOUNTING.
- » Orders must be placed by model + dimensions.



Options	Cabinet Colour	Accessories	Cabinet
	RAL Ref.: (custom colour)	Trim frame	Stainless Steel A 304 Stainless Steel A 430 Stainless Steel A 316





Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.



# Fire Extinguisher Cabinets

For WALL-MOUNTING or RECESS-MOUNTING

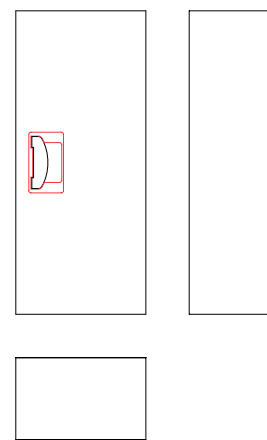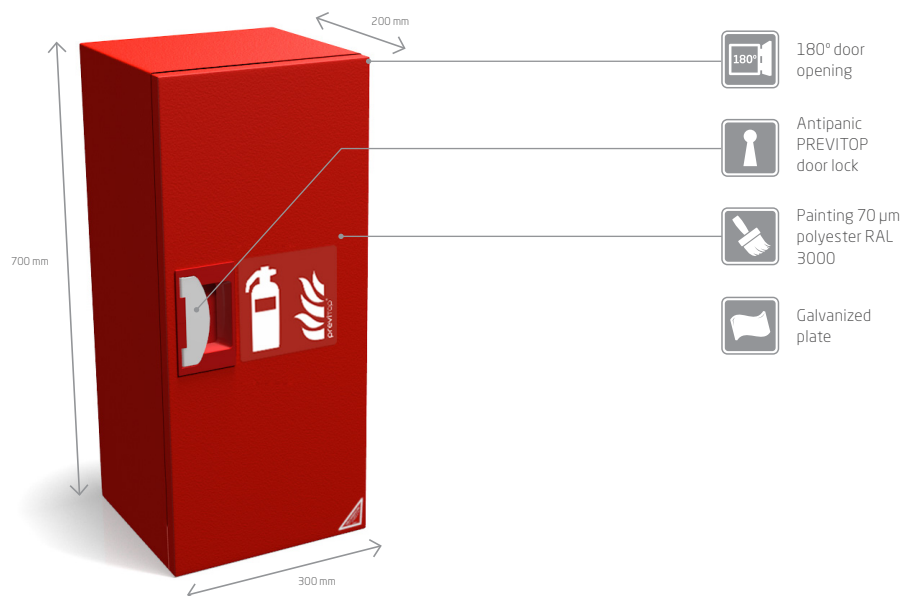

To download a CAD file please go to [www.previtop.pt](http://www.previtop.pt). Free registration and download.

Reference	Fire extinguisher Max. Weight (Kg)	Dimensions (mm) H x W x D
13-5H	5	850 x 300 x 200
13-6H	2 and 6	700 x 300 x 200
		700 x 300 x 260
13-12H	12	700 x 350 x 250
20.1	Trim frame 25 mm	700 x 300
		700 x 350
		850 x 300

## CABINET SPECIFICATIONS

- » Cabinet made in 1 mm galvanized steel plate.
- » Painting 70 µm polyester RAL 3000 or RAL 7032.
- » Antipanic PREVITOP door lock.
- » Drilled holes for mounting.
- » 180° door opening.
- » Exterior door.

## INCLUDES

- » Door sign in accordance with ISO 7010.

## NOTES

- » The cabinet can be used for WALL-MOUNTING or RECESS-MOUNTING.
- » Orders must be placed by model + dimensions.





Ideal for use in schools, industrial premises, parking lots, sports arenas, etc.

Options	Cabinet Colour	Accessories	Cabinet
	RAL Ref.: (custom colour)	Mark lock/ Trim frame/ Triangular type metallic lock	Stainless Steel A 304 Stainless Steel A 430 Stainless Steel A 316

# Fire Extinguisher Cabinets

For WALL-MOUNTING

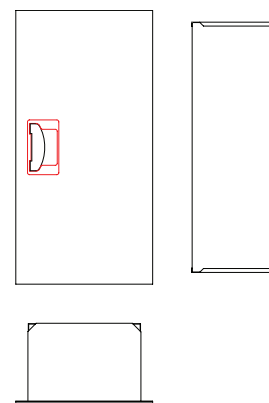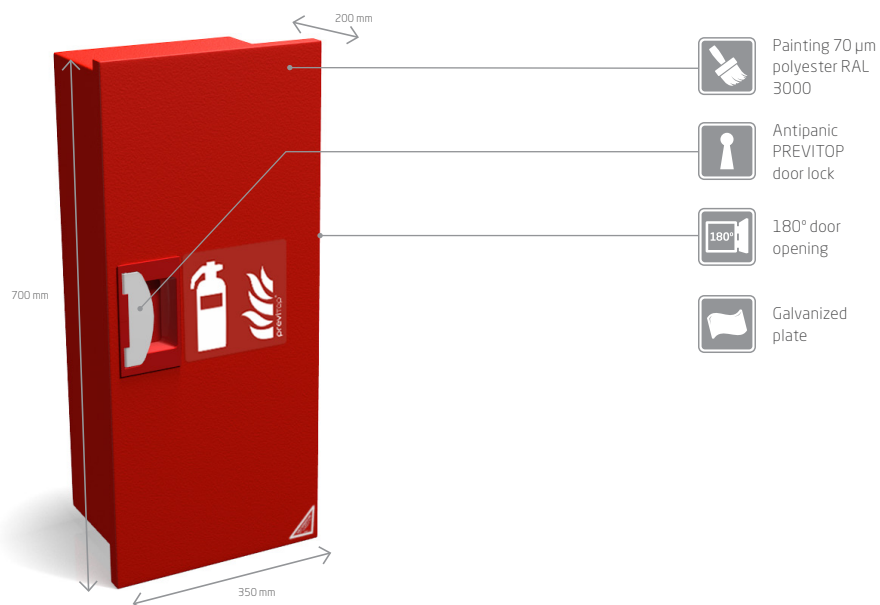

To download a CAD file please go to [www.previtop.pt](http://www.previtop.pt). Free registration and download.

Reference	Fire extinguisher Max. Weight (Kg)	Dimensions (mm) H x W x D (work)	Dimensions (mm) H x W x D
13.2-5H	5	850 x 310 x 205	850 x 350 x 200
13.2-6H	2 and 6	660 x 310 x 205	700 x 350 x 200
13.2-12H	12	660 x 310 x 265	700 x 350 x 260

## CABINET SPECIFICATIONS

- » Cabinet made in 0,8 mm galvanized steel plate.
- » Painting 70 µm polyester RAL 3000 or RAL 7032.
- » Antipanic PREVITOP door lock.
- » 180° door opening.
- » Exterior door.

## NOTES

- » The same cabinet is used for recess-mounting.
- » Cabinet used for fire extinguisher or other equipment.
- » Fire extinguisher is not included.
- » Orders must be placed by model + dimensions.

## INCLUDES

- » Door sign in accordance with ISO 7010.



Ideal for use in schools, industrial premises, parking lots, sports arenas, etc.

Options	Accessories	Cabinet
	Door with vision panel	Stainless Steel A 304 Stainless Steel A 430 Stainless Steel A 316