

STANDARD Range



previTOP®



PREVITOP - Comércio e Serviços Unipessoal, Lda
www.previtop.pt



Company Registered in ANPC with nº 500

Fire Hose Reel and Cabinet

HOSE SYSTEM 25 MM

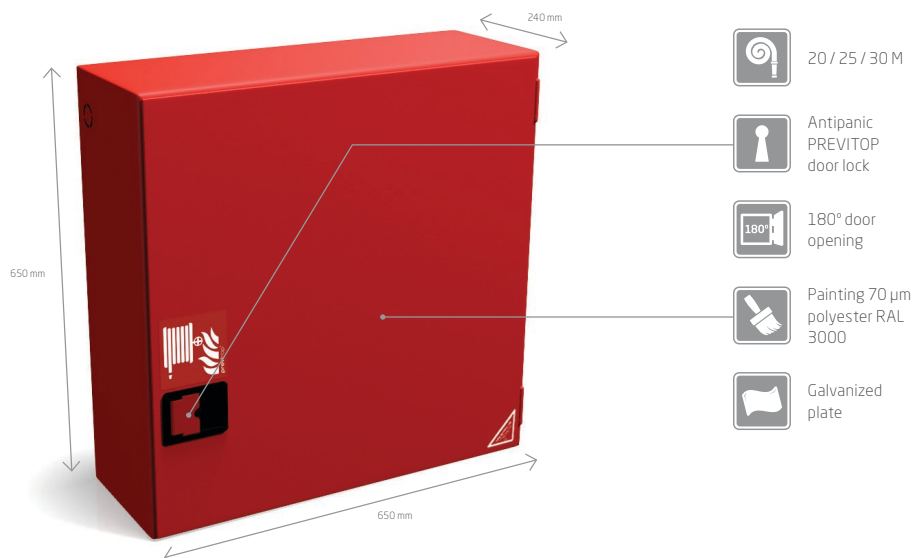

To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11-20S	20 and 25	650 x 650 x 240
11-25S		
11-30S	30	650 x 650 x 260
20.1	Trim frame 25 mm	650 x 650

HOSE REEL SPECIFICATIONS

- » Rim in 1 mm galvanized steel plate.
- » Reel in galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

CABINET SPECIFICATIONS

- » Cabinet in A304 0,8 mm stainless steel plate.
- » Painting 70 µm polyester RAL 3000 or RAL 7032.
- » Antipanic PREVITOP door lock.
- » Ventilated sides.
- » Drilled holes for mounting.
- » 180° door opening.
- » Interior door w/ barrel hinge.

INCLUDES

- » Water supplier with:
 - » Male ball valve with 1" manometer;
 - » 25 mm male connection fitting;
 - » "Super" hose clamp.
- » Axial support (SWINGING).
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

NOTES

- » This cabinet can be requested with the measurements shown in the options box to accommodate a globe valve/storz.
- » The globe valve is sold separately.
- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The cabinet can be used for WALL-MOUNTING or RECESS-MOUNTING.
- » Orders must be placed by model + dimensions.



The valve lamp is sold separately.





Options	Cabinet Colour	Accessories	Other Dimensions
	RAL Ref.: (custom colour)	Door with vision panel/ Trim frame/ Globe valve/storz	700 x 700 x 260
			650 x 800 x 240**
			800 x 800 x 240**

CE Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

Fire Hose Reel and Stainless Steel Cabinet

HOSE SYSTEM 25 MM

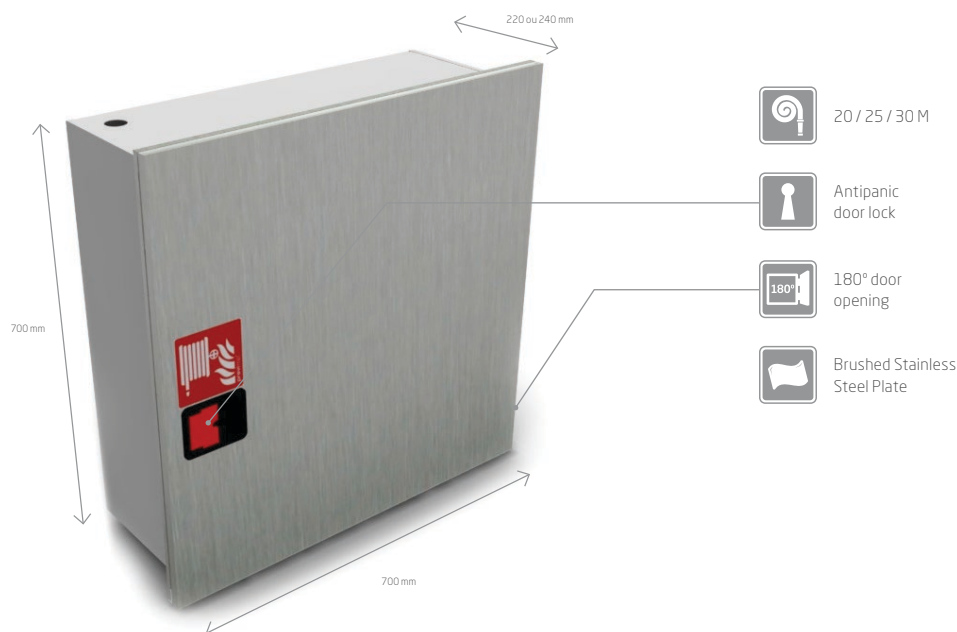

To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11.2-20S	20 and 25	700 x 700 x 220
11.2-25S		
11.2-30S	30	700 x 700 x 240

HOSE REEL SPECIFICATIONS

- » Rim in 1 mm galvanized steel plate.
- » Reel in galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

CABINET SPECIFICATIONS

- » Cabinet in A304 stainless steel 0,8 mm plate.
- » Brushed finish.
- » Antipanic door lock.
- » Ventilated sides.
- » Drilled holes for mounting.
- » 180° door opening.

INCLUDES

- » Water supplier with:
 - » Male ball valve with 1" manometer;
 - » 25 mm male connection fitting;
 - » "Super" hose clamp.
- » Axial support (SWINGING).
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

NOTES

- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The cabinet can be used for WALL-MOUNTING or RECESS-MOUNTING.
- » Minimum RECESS-MOUNTING hole size: 700 x 220 or 240 mm.
- » Orders must be placed by model + dimensions.
- » Accessories for connecting to water supplier not included.





Ideal for use in schools, office buildings, hospitals, sports arenas, cinemas, etc.

Options	Cabinet	Accessories
	Stainless Steel A 304 Stainless Steel A 316	Door with vision panel/Trim frame/ Globe valve/ storz

CE Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

Fire Hose Reel and Cabinet with Compartment for Fire Extinguisher

HOSE SYSTEM 25 MM

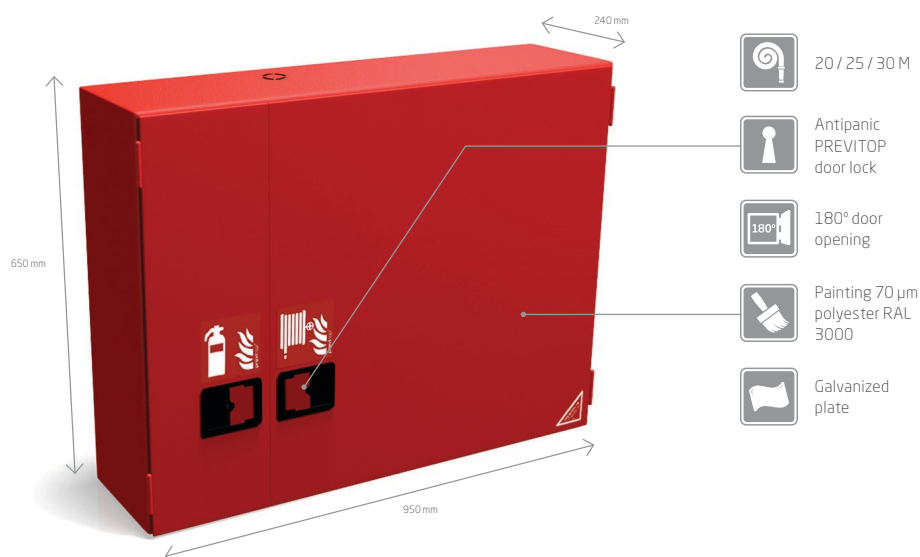

To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11.1-20S	20 and 25	650 x 950 x 240
11.1-25S		
11.1-30S	30	650 x 950 x 260
20.1	Trim frame 25 mm	650 x 950



Ideal for use in schools, office buildings, hospitals, sports arenas, cinemas, etc.

HOSE REEL SPECIFICATIONS

- » Rim in 1 mm galvanized steel plate.
- » Reel in galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

CABINET SPECIFICATIONS

- » Cabinet in galvanized steel plate 1 mm.
- » Painting 70 µm polyester RAL 3000 or RAL 7032.
- » Antipanic PREVITOP door lock.
- » Ventilated sides.
- » Drilled holes for mounting.
- » 180° door opening.
- » Interior door w/ barrel hinge.

INCLUDES

- » Water supplier with:
 - » Male ball valve with 1" manometer;
 - » 25 mm male connection fitting;
 - » "Super" hose clamp.
- » Axial support (SWINGING).
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

NOTES



- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The cabinet can be used for WALL-MOUNTING or RECESS-MOUNTING.
- » Orders must be placed by model + dimensions.

Options	Cabinet Colour	Accessories	Cabinet	Other Dimensions (mm)
	RAL Ref.: (custom colour)	Door with vision panel/ Trim frame	Stainless Steel A 304 Stainless Steel A 430 Stainless Steel A 316	700 x 980 x 260

CE Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

Fire Hose Reel and Stainless Steel Cabinet with Compartment for Fire Extinguisher

HOSE SYSTEM 25 MM

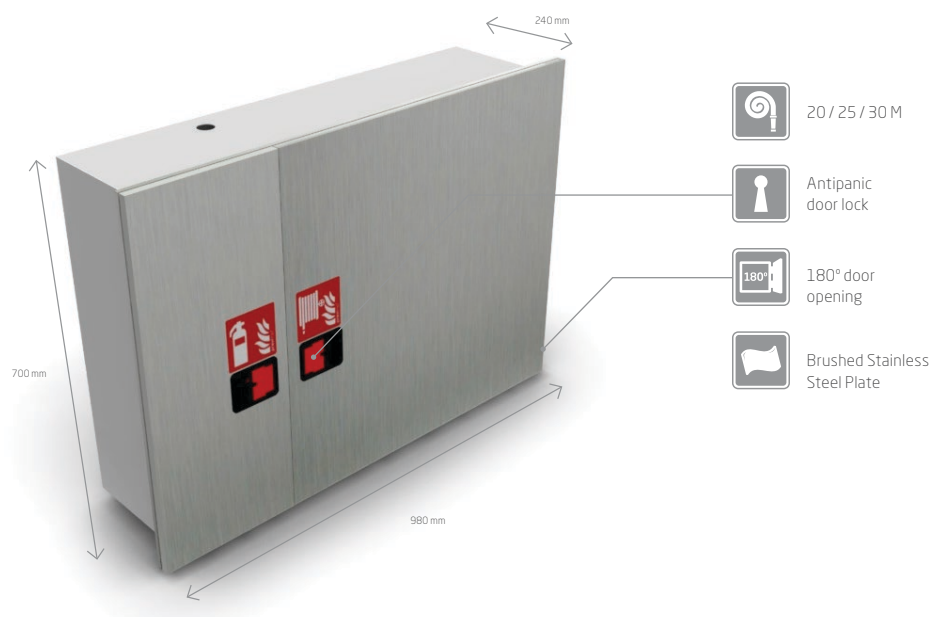

Caso pretenda uma cópia do desenho em CAD consulte o site www.previtop.pt. Registe-se gratuitamente e faça o download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11.2.1-20S	20 and 25	700 x 980 x 220
11.2.1-25S		
11.2.1-30S	30	700 x 980 x 240

HOSE REEL SPECIFICATIONS

- » Rim in 1 mm galvanized steel plate.
- » Reel in galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

CABINET SPECIFICATIONS

- » Cabinet in A304 stainless steel 0,8 mm plate.
- » Brushed finish.
- » Antipanic door lock.
- » Ventilated sides.
- » Drilled holes for mounting.
- » 180° door opening.

INCLUDES

- » Water supplier with:
 - » Male ball valve with 1" manometer;
 - » 25 mm male connection fitting;
 - » "Super" hose clamp.
- » Axial support (SWINGING).
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

NOTES

- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The cabinet can only be used for RECESS-MOUNTING.
- » Minimum RECESS-MOUNTING hole size: 670 x 950 x 220 or 240 mm.
- » Orders must be placed by model + dimensions.
- » Accessories for connecting to water supplier not included.




Ideal for use in schools, office buildings, hospitals, sports arenas, cinemas, etc.

Options	Cabinet	Accessories
	Stainless Steel A 304 Stainless Steel A 316	Door with vision panel/Trim frame/ Globe valve/storz

CE Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

Fire Hose Reel and Cabinet

HOSE SYSTEM 25 MM

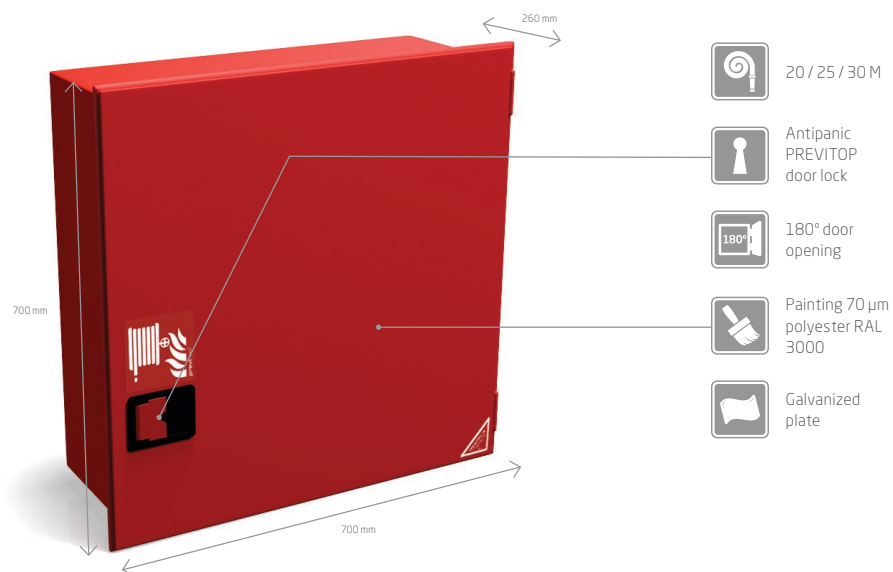

20 / 25 / 30 M



Antipanic
PREVITOP
door lock




180° door
opening



Painting 70 µm
polyester RAL
3000



Galvanized
plate



To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11.2-20S	20, 25 and 30	700 x 700 x 260
11.2-25S		
11.2-30S		

HOSE REEL SPECIFICATIONS

- » Rim in 1 mm galvanized steel plate.
- » Reel in galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

CABINET SPECIFICATIONS

- » Inner box in 0,8 and 1,0 mm galvanized steel plate.
- » Cabinet claw clamps.
- » Frame with 1 mm galvanized plate door.
- » Painting 70 µm polyester RAL 3000 or RAL 7032.
- » Antipanic PREVITOP door lock.
- » Ventilated sides.
- » 180° door opening.
- » Interior door w/ barrel hinge.

INCLUDES

- » Water supplier with:
 - » Male ball valve with 1" manometer;
 - » 25 mm male connection fitting;
 - » "Super" hose clamp.
- » Axial support (SWINGING).
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

NOTES

- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The advised measure for the recess is 670 x 670 x 260 mm.
- » RECESS-MOUNTING only.
- » Orders must be placed by model + dimensions.





Ideal for use in schools, office buildings, hospitals, sports arenas, cinemas, etc.

Options	Cabinet Colour	Accessories	Cabinet
	RAL Ref.: (custom colour)	Door with vision panel	Stainless Steel A 304 Stainless Steel A 430 Stainless Steel A 316

CE Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n° 1328-CPR-0149.

Fire Hose Reel and Cabinet with Compartment for Fire Extinguisher

HOSE SYSTEM 25 MM

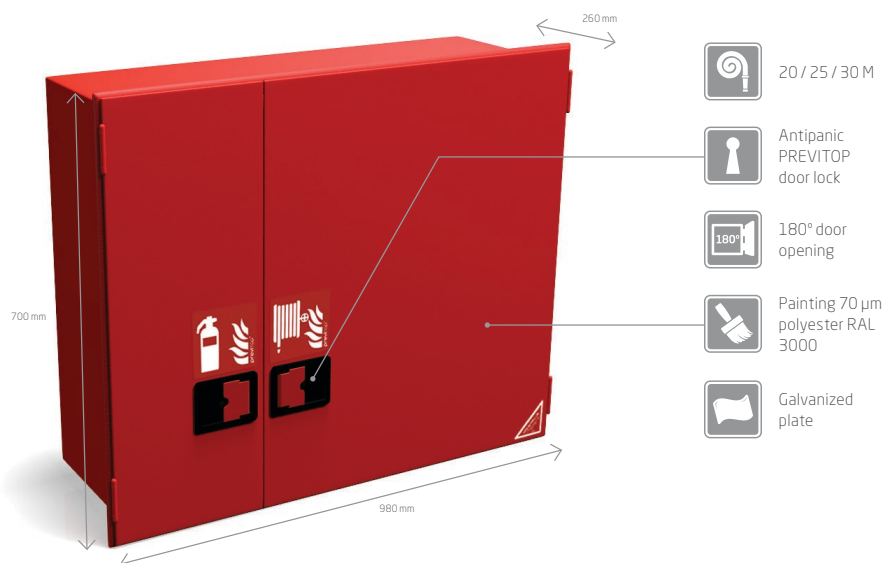

To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11.2.1-20S	20, 25 and 30	700 x 980 x 260
11.2.1-25S		
11.2.1-30S		
20.1		700 x 980



Ideal for use in schools, office buildings, hospitals, sports arenas, cinemas, etc.

HOSE REEL SPECIFICATIONS

- » Rim in 1 mm galvanized steel plate.
- » Reel in galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

CABINET SPECIFICATIONS

- » Inner box in 0,8 and 1,0 mm galvanized steel plate.
- » Cabinet claw clamps.
- » Frame with 1 mm galvanized plate door.
- » Vertical prop for door jambs.
- » Painting 70 µm polyester RAL 3000 or RAL 7032.
- » Antipanic PREVITOP door lock.
- » Ventilated sides.
- » 180° door opening.
- » Interior door w/ barrel hinge.

INCLUDES

- » Water supplier with:
 - » Male ball valve with 1" manometer;
 - » 25 mm male connection fitting;
 - » "Super" hose clamp.
- » Axial support (SWINGING).
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

NOTES


- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The advised measure for the recess is 670 x 950 x 260 mm.
- » RECESS-MOUNTING only.
- » Orders must be placed by model + dimensions.

Options	Cabinet Colour	Accessories	Cabinet	Other Dimensions (mm)
	RAL Ref.: (custom colour)	Door with vision panel/ Trim frame	Stainless Steel A 304 Stainless Steel A 430 Stainless Steel A 316	700 x 950 x 260

CE Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

Hose Reel and Cabinet with Foam Tank

HOSE SYSTEM 25 MM



To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11.3-20S	20, 25 and 30	700 x 1200 x 260
11.3-25S		
11.3-30S		
20.1	Trim frame 25 mm	700 x 1200



Ideal for use in fueling stations.

HOSE REEL SPECIFICATIONS

- » Rim in 1 mm galvanized steel plate.
- » Reel in galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

CABINET SPECIFICATIONS

- » Cabinet in galvanized steel plate 1 mm.
- » Painting 70 µm polyester RAL 3000 or RAL 7032.
- » Antipanic PREVITOP door lock.
- » Drilled holes for mounting.
- » Vertical prop for door jambs.
- » Ventilated sides.
- » 180° door opening.
- » Interior door w/ barrel hinge.

INCLUDES

- » Water supplier with:
 - » Male ball valve with 1" manometer;
 - » 25 mm male connection fitting;
 - » "Super" hose clamp;
- » Axial support (SWINGING).
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

NOTES



- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The advised measure for the recess is 670 x 950 x 260 mm.
- » The cabinet can be used for WALL-MOUNTING or RECESS-MOUNTING.
- » Orders must be placed by model + dimensions.

Options	Cabinet Colour	Accessories	Cabinet
	RAL Ref.: (custom colour)	Door with vision panel/ Trim frame	Stainless Steel A 304 Stainless Steel A 430 Stainless Steel A 316

CE Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

Pull-out Fire Hose Reel

HOSE SYSTEM 25 MM

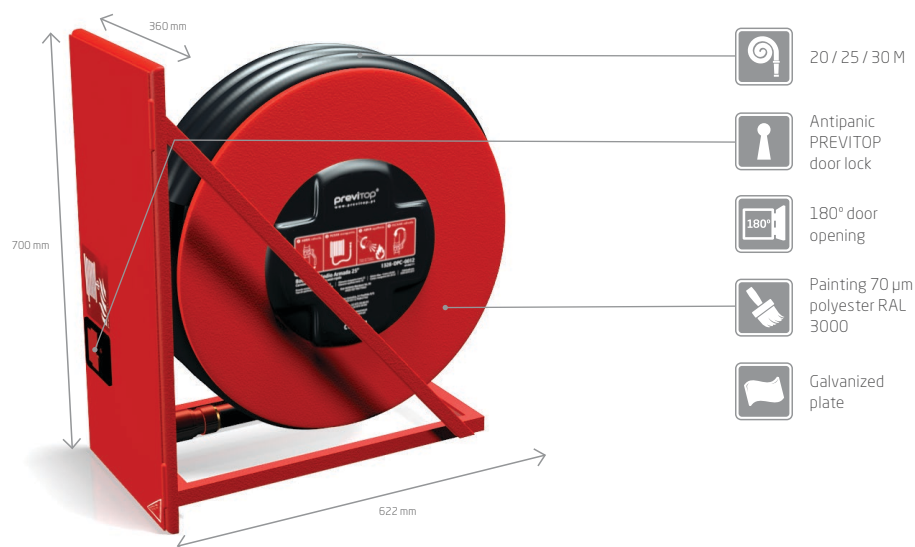

To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11.4-20S	20, 25 and 30	700 x 360 x 622
11.4-25S		
11.4-30S		

HOSE REEL SPECIFICATIONS

- » Rim in 1 mm galvanized steel plate.
- » Reel in galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

CABINET SPECIFICATIONS

- » Frame in galvanized steel plate 1 mm.
- » Coulisse.
- » Painting 70 µm polyester RAL 3000 or RAL 7032.
- » Antipanic PREVITOP door lock.
- » Drilled holes for mounting.
- » 180° door opening.
- » Interior door w/ barrel hinge.

INCLUDES

- » Water supplier with:
 - » Male ball valve with 1" manometer;
 - » 25 mm male connection fitting;
 - » "Super" hose clamp.
- » Hose guide.
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

NOTES

- » The reel can easily be removed from the cabinet to facilitate the installation.
- » RECESS-MOUNTING only.
- » Orders must be placed by model + dimensions.




Options	Cabinet Colour	Cabinet
	RAL Ref.: (custom colour)	Stainless Steel A 304 Stainless Steel A 430 Stainless Steel A 316

CE Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

Fire Hose Reel and Vertical Combined Cabinet with Equipment Compartment

HOSE SYSTEM 25 MM

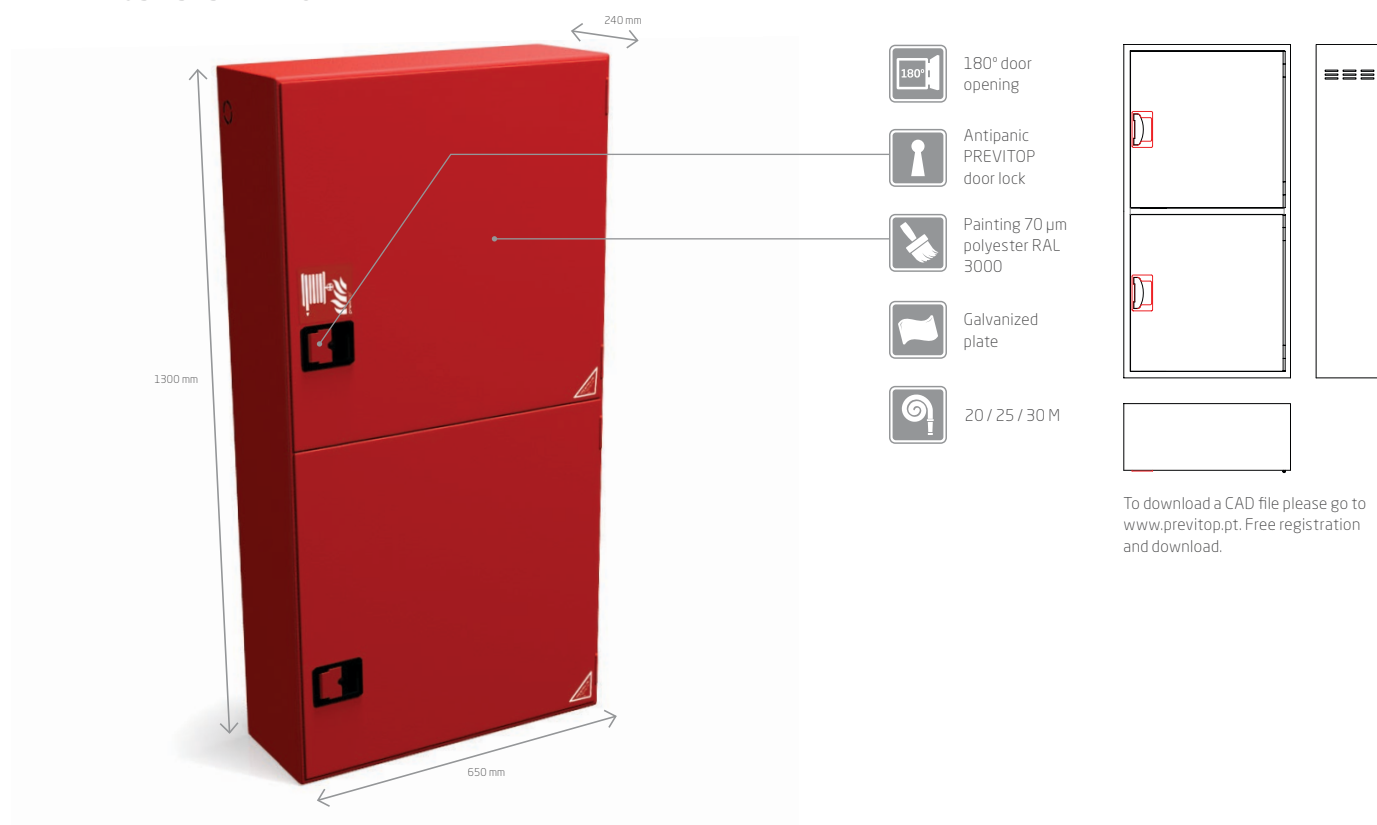

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11.5-20S	20 and 25	1300 x 650 x 240
11.5-25S		
11.5-30S	30	1300 x 650 x 260
20.1	Trim frame 25 mm	1300 x 650

HOSE REEL SPECIFICATIONS

- » Rim in 1 mm galvanized steel plate.
- » Reel in galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, 25 or 30 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

CABINET SPECIFICATIONS

- » Cabinet in galvanized steel plate 1 mm.
- » Double vertical and equal compartments.
- » Painting 70 µm polyester RAL 3000.
- » Antipanic PREVITOP door lock.
- » Ventilated sides.
- » Drilled holes for mounting.
- » 180° door opening.
- » Interior door w/ barrel hinge.

INCLUDES

- » Water supplier with:
 - » Male ball valve with 1" manometer;
 - » 25 mm male connection fitting;
 - » "Super" hose clamp.
- » Axial support (SWINGING).
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

NOTES

- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The cabinet can be used for WALL-MOUNTING or RECESS-MOUNTING.
- » Orders must be placed by model + dimensions.

Options	Cabinet Colour	Accessories	Cabinet
	RAL Ref.: (custom colour)	Trim frame	Stainless Steel A 304 Stainless Steel A 430 Stainless Steel A 316

CE

Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

Fire Hose Reel and Cabinet

HOSE SYSTEM 25 MM



180° door opening



20 / 25 M




Painting 70 µm polyester RAL 3000



Antipanic PREVITOP door lock



Galvanized plate



To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11.6-20S	20 and 25	750 x 600 x 270
11.6-25S		
20.1	Trim frame 25 mm	750 x 600

HOSE REEL SPECIFICATIONS

- » Rim in 1 mm galvanized steel plate.
- » Reel in galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20 or 25).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

CABINET SPECIFICATIONS

- » Cabinet in galvanized steel plate 1 mm.
- » Painting 70 µm polyester RAL 3000.
- » Reinforced bottom for fire hose reel support.
- » Antipanic PREVITOP door lock.
- » Ventilated sides.
- » Drilled holes for mounting.
- » 180° door opening.
- » Interior door w/ barrel hinge.

INCLUDES

- » Male ball valve with 1" manometer.
- » Fixed support.
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

NOTES

- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The cabinet can be used for WALL-MOUNTING or RECESS-MOUNTING.
- » Orders must be placed by model + dimensions.



Reference

11.6V-20S or 11.6V-25S


Ideal for use in schools, office buildings, hospitals, sports arenas, cinemas, etc.

Options	Cabinet Colour	Accessories	Cabinet
	RAL Ref.: (custom colour)	Door with vision panel/ Trim frame	Stainless Steel A 304
			Stainless Steel A 430
			Stainless Steel A 316

CE Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

Fire Hose Reel and Cabinet

HOSE SYSTEM 25 MM

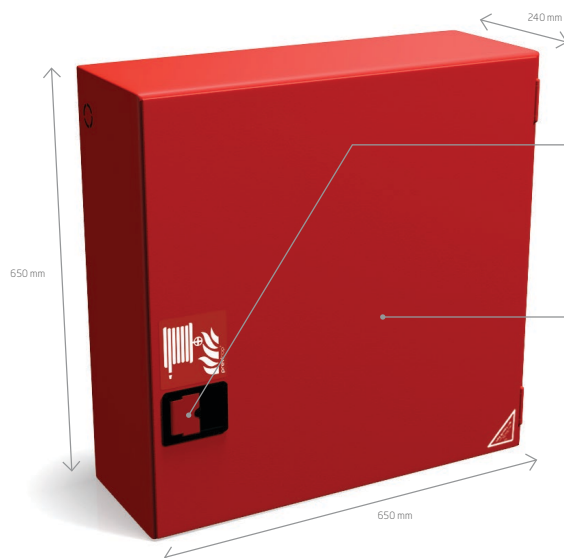

20 / 25 / 30 M



Antipanic
PREVITOP
door lock




180° door
opening



Painting 70 µm
polyester RAL
3000



Galvanized
plate



To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Hose Length (m) Ø 25 mm	Dimensions (mm) H x W x D
11.7-20S	20 and 25	650 x 650 x 240
11.7-25S		
20.1	Trim frame 25 mm	650 x 650

HOSE REEL SPECIFICATIONS

- » Rim in 1 mm galvanized steel plate.
- » Reel in galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Bronze rotary valve.
- » Semi-rigid polyester reinforced PVC hose according to EN 694:2001+A1:2007 (20, or 25 metres).
- » 3 position nozzle: jet, spray, shut-off 25 mm male inlet.
- » PVC centre with EC marking sticker.

CABINET SPECIFICATIONS

- » Cabinet in galvanized steel plate 1 mm.
- » Painting 70 µm polyester RAL 3000 or RAL 7032.
- » Antipanic PREVITOP door lock.
- » Ventilated sides.
- » Drilled holes for mounting.
- » 180° door opening.
- » Interior door w/ barrel hinge.

INCLUDES

- » Water supplier with:
 - » Male ball valve with 1" manometer;
 - » 25 mm male connection fitting;
 - » "Super" hose clamp.
- » Axial support (SWINGING).
- » Door sign in accordance with ISO 7010.
- » Installation and maintenance instructions.

NOTES

- » This cabinet can be requested with the measurements shown in the options box to accommodate a globe valve/storz.
- » The globe valve is sold separately.
- » The reel can easily be removed from the cabinet to facilitate the installation.
- » The cabinet can be used for WALL-MOUNTING or RECESS-MOUNTING.
- » Orders must be placed by model + dimensions.





The valve lamp is sold separately.

Options	Cabinet Colour	Accessories	Other Dimensions
	RAL Ref.: (custom colour)	Door with vision panel/ Trim frame/ Globe valve/storz	700 x 700 x 260
			650 x 800 x 240**
			800 x 800 x 240**

CE Hose reel tested, approved and CE marked according to NP EN 671-1:2012 CE n.º 1328-CPR-0149.

Cabinet with Fire Hose Reel

HOSE SYSTEM 45 MM

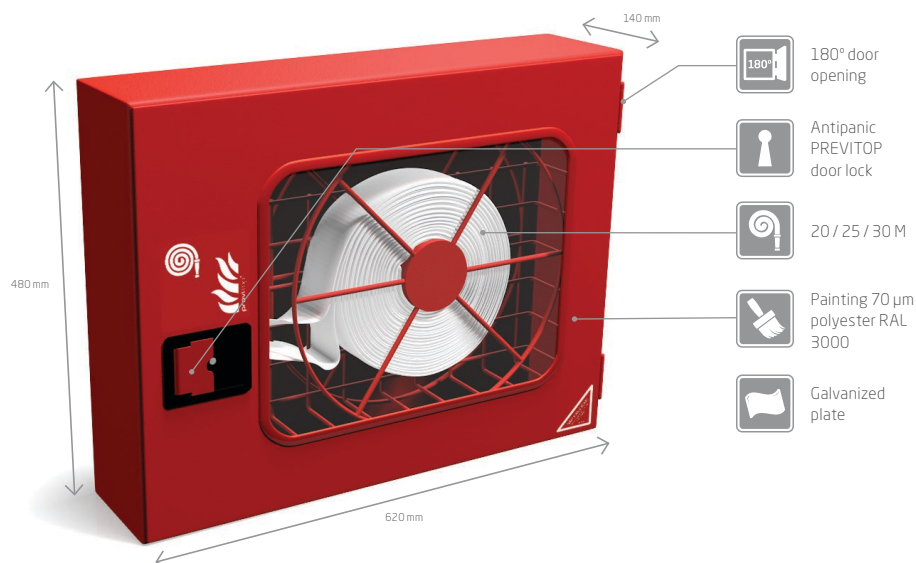

To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Hose Length (m) Ø 45 mm	Dimensions (mm) H x W x D
12-20S	20	480 x 620 x 140
20.1	Trim frame 25 mm	620 x 480

HOSE REEL SPECIFICATIONS

- » Fire hose reel in 6 and 8 mm wire gauge.
- » Painting 70 µm polyester RAL 3000.
- » 3 position nozzle: jet, spray and shut-off.
- » White canvas hose with 45 diameter, according EN 14540:2004+A1:2007 (20 metres).

CABINET SPECIFICATIONS

- » Cabinet in galvanized steel plate 0,8 mm.
- » Painting 70 µm polyester RAL 3000 or RAL 7032.
- » Antipanic PREVITOP door lock.
- » Ventilated sides.
- » Drilled holes for mounting.
- » 180° door opening.
- » Interior door w/ barrel hinge.

CHARACTERISTICS OF SUPPORT HOSE

- » Type 1.

INCLUDES

- » 2" globe type valve.
- » Nozzle support.
- » 45 mm male brass connection fitting.
- » Door sign in accordance with ISO 7010.
- » CE marking sticker.
- » Installation and maintenance instructions.

NOTES

- » The cabinet can be used for WALL-MOUNTING or RECESS-MOUNTING.
- » Orders must be placed by model + dimensions.





Ideal for use in schools, office buildings, hospitals, sports arenas, cinemas, etc.

Options	Cabinet Colour	Accessories	Cabinet
	RAL Ref.: (custom colour)	Door with vision panel/ Couplings Storz	Stainless Steel A 304
			Stainless Steel A 430
			Stainless Steel A 316

CE Hose system tested, approved and CE marked according to NP EN 671-2:2012 CE n.º 1328-CPR-0237.

Cabinet with Fire Hose Reel and Compartment for Fire Extinguisher

HOSE SYSTEM 45 MM

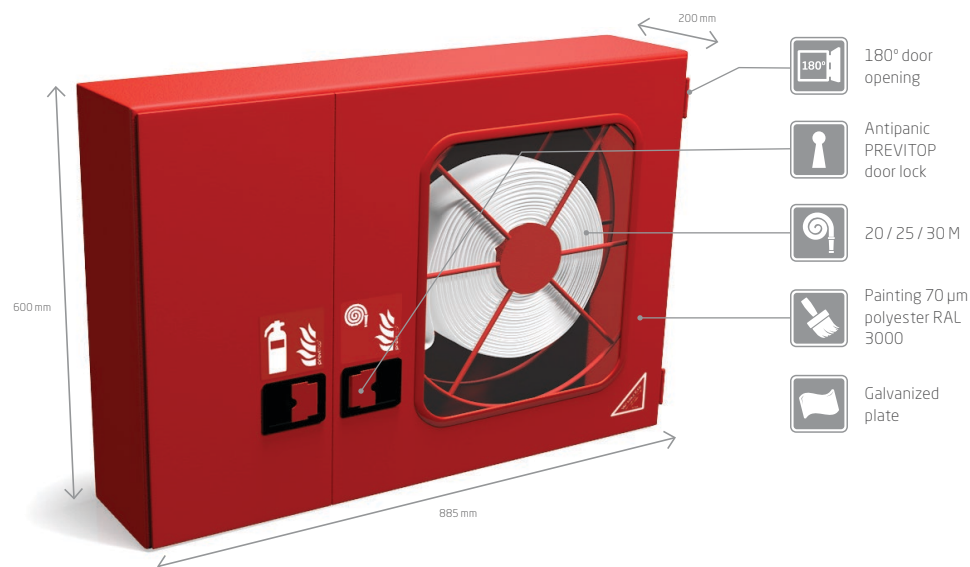

To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Hose Length (m) Ø 45 mm	Dimensions (mm) H x W x D
12.1-20S	20	600 x 855 x 200
20.1	Trim frame 25 mm	855 x 600

HOSE REEL SPECIFICATIONS

- » Fire hose reel in 6 and 8 mm wire gauge.
- » Painting 70 µm polyester RAL 3000.
- » 3 position nozzle: jet, spray and shut-off.
- » White canvas hose with 45 diameter, according EN 14540:2004+A1:2007 (20 metres).

CABINET SPECIFICATIONS

- » Cabinet in galvanized steel plate 0,8 mm.
- » Vertical prop for door jambs.
- » Painting 70 µm polyester RAL 3000.
- » Antipanic PREVITOP door lock.
- » Ventilated sides.
- » Drilled holes for mounting.
- » 180° door opening.
- » Interior door w/ barrel hinge.

CHARACTERISTICS OF SUPPORT HOSE

- » Type 1.

INCLUDES

- » 2" globe type valve.
- » Nozzle support.
- » 45 mm male brass connection fitting.
- » Door sign in accordance with ISO 7010.
- » CE marking sticker.
- » Installation and maintenance instructions.

NOTES

- » The cabinet can be used for WALL-MOUNTING or RECESS-MOUNTING.
- » Orders must be placed by model + dimensions.



Reference

12.1V-20S with glass



Ideal for use in schools, office buildings, hospitals, sports arenas, cinemas, etc.

Options	Cabinet Colour	Accessories	Cabinet
	RAL Ref.: (custom colour)	Door with vision panel/ Couplings Storz	Stainless Steel A 304
			Stainless Steel A 430
			Stainless Steel A 316

CE Hose system tested, approved and CE marked according to NP EN 671-2:2012 CE n.º 1328-CPR-0237.

Fire Extinguisher Cabinets

For WALL-MOUNTING or RECESS-MOUNTING

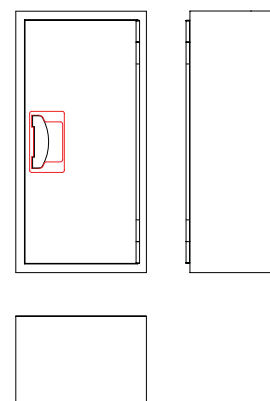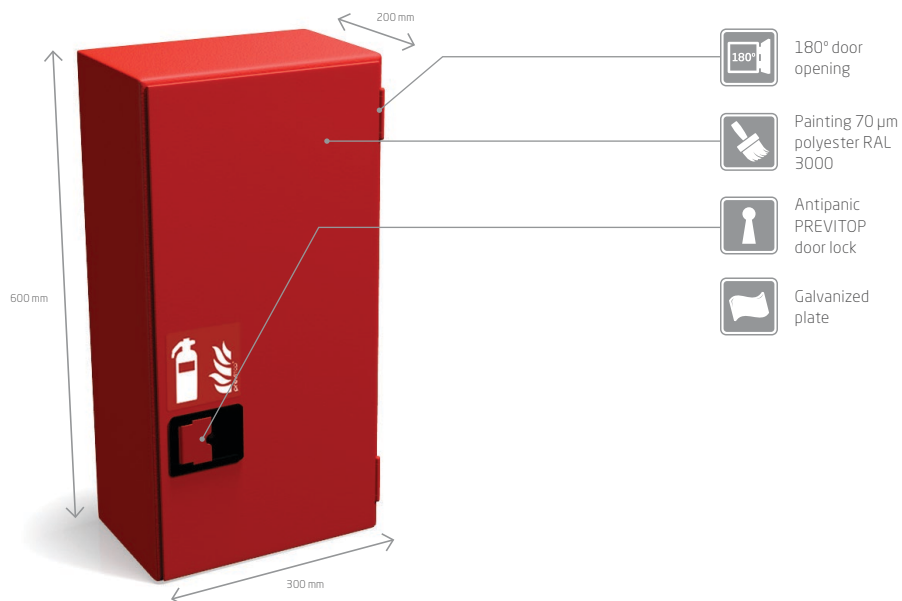

To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Peso Max. Extintor (Kg)	Dimensions (mm) H x W x D
13-5S	5	850 x 300 x 200
13-6S	2 and 6	600 x 300 x 200
		650 x 300 x 200
		700 x 300 x 200
13-12S	12	700 x 350 x 250
20.1	Trim frame 25 mm	600 x 300

CABINET SPECIFICATIONS

- » Cabinet made in 0,8 mm and 1 mm galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Antipanic PREVITOP door lock.
- » Drilled holes for mounting.
- » 180° door opening.
- » Interior door w/ barrel hinge.

INCLUDES

- » Door sign in accordance with ISO 7010.

NOTES

- » The cabinet can be used for WALL-MOUNTING or RECESS-MOUNTING.
- » Orders must be placed by model + dimensions.



Reference



13V-S

Ideal for use in schools, industrial premises, parking lots, sports arenas, etc.

Options	Cabinet Colour	Accessories	Cabinet
	RAL Ref.: (custom colour)	Door with vision panel/ Trim frame/ Lock metallic triangular	Stainless Steel A 304
			Stainless Steel A 430
			Stainless Steel A 316

Fire Extinguisher Cabinets

For WALL-MOUNTING

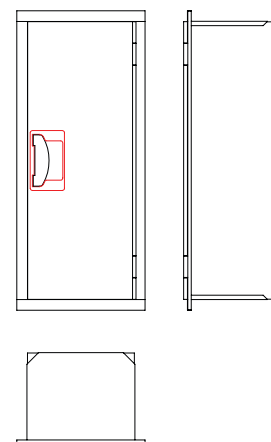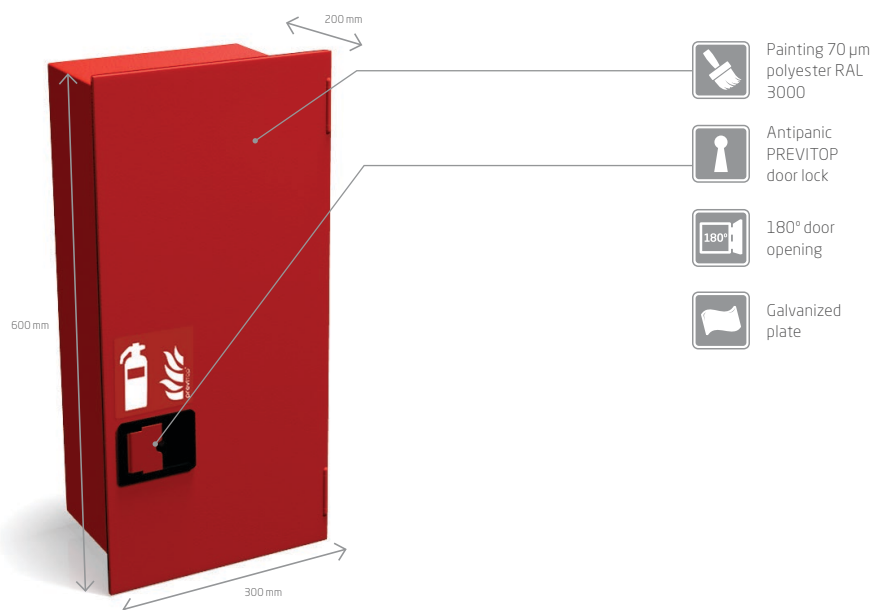

To download a CAD file please go to www.previtop.pt. Free registration and download.

Reference	Fire Extinguisher Weight (Kg)	Dimensions (mm) H x W x Dv (Work)	Dimensions (mm) H x W x D
13.2-5S	5	820 x 260 x 205	850 x 300 x 200
13.2-6S	2 and 6	570 x 260 x 205	600 x 300 x 200
		620 x 260 x 205	650 x 300 x 200
		670 x 260 x 205	700 x 300 x 200
13.2-12S	12	670 x 310 x 255	700 x 350 x 250

CABINET SPECIFICATIONS

- » Cabinet made in 0,8 mm and 1 mm galvanized steel plate.
- » Painting 70 µm polyester RAL 3000.
- » Antipanic PREVITOP door lock.
- » Drilled holes for mounting.
- » 180° door opening.
- » Interior door w/ barrel hinge.

INCLUDES

- » Door sign in accordance with ISO 7010.

NOTES

- » The cabinet can be used in order RECESS-MOUNTING.
- » Orders must be placed by model + dimensions.



Ideal for use in schools, industrial premises, parking lots, sports arenas, etc.

Options	Cabinet Colour	Accessories	Cabinet
	RAL Ref.: (custom colour)	Lock metallic triangular	Stainless Steel A 304
			Stainless Steel A 430
			Stainless Steel A 316

BASE Range



previTOP®

PREVITOP - Comércio e Serviços Unipessoal, Lda
www.previtop.pt



Company Registered in ANPC with n° 500